

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 February 2005 (24.02.2005)


PCT

(10) International Publication Number  
**WO 2005/017749 A1**

- (51) International Patent Classification<sup>7</sup>: **G06F 9/46** (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/EP2004/008841
- (22) International Filing Date: 5 August 2004 (05.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0319014.7 14 August 2003 (14.08.2003) GB
- (71) Applicant (for all designated States except US): **SIEMENS AKTIENGESELLSCHAFT** [DE/DE]; Wittelsbacherplatz 2, 80333 Munich (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LUCAS, Pedro** [PT/PT]; Pcta do Comercio 15, P-2720-111 Amadora (PT).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF RESETTING A PLURALITY OF CONNECTED UNITS

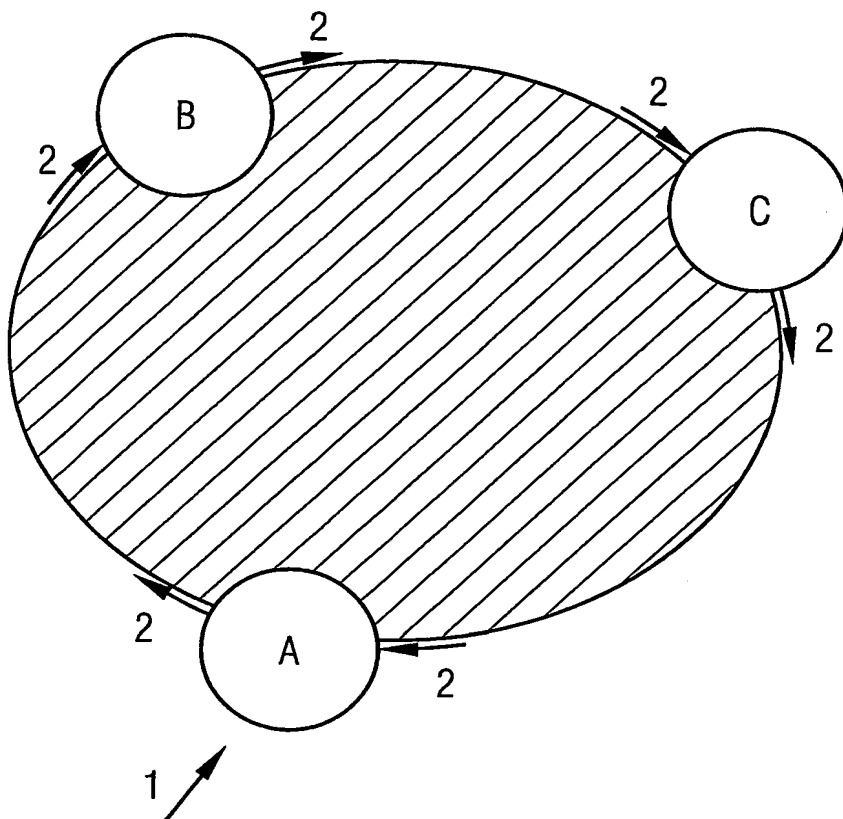

(57) Abstract: A method of resetting a plurality of connected nodes comprising initiating a reset request at a first node; sending a packet from said first node to a second node wherein said packet is recognised by said second node as a reset command, and said second node resets itself. Usually the reset request packet is send serially and sequentially to further nodes. The nodes may be arranged in a ring.



**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*